



GS 3/78 OIL

Multipurpose solution designed to separate oil from shavings

Wet and dry vacuum cleaner featuring three two-stage motors and equipped with a large capacity stainless steel tank with tipping trolley for easily emptying the tank.

- Equipped with a **bucket sieve** to separate oil from shavings.



- **System W** for **simultaneous** DRY AND WET&DRY PICK UP.





TECHNICAL SPECS

Code	Usage	Motor	Power Max	Voltage	Water lift	Air flow	Tank capacity	Inlet
ASDO015122	W/D	n. 3 two stages	3500 Watt	220-240 Volt	2500 mmH2O	645 m3/h	78 lt	60 mm



TECHNICAL FEATURES

- a) 78 lt stainless steel AISI 430 tank
- b) Bucket sieve
- c) System W
- d) Mesh filter
- e) Tangential aluminium inlet
- f) Drain valve
- g) Metal hooks
- h) Light switches
- i) Tipping trolley
- j) Handle for tank emptying

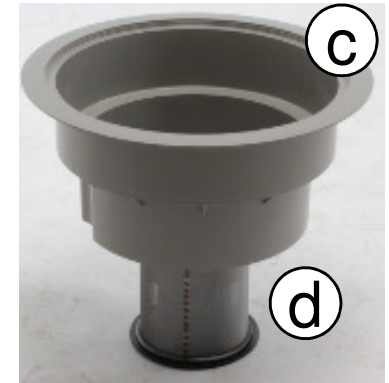



MODE OF OPERATION

1 - Cleaning of production machinery



2 - Removal of the W System



3 - Removal of the ring gasket





MODE OF OPERATION

4 - The bucket sieve is full of metal shavings



5 - Extractable bucket sieve



6 - Full bucket sieve ready for disposal





RECOMMENDED ACCESSORIES KIT

ANTI-OIL TOOL KIT Ø38-60 mm

- **Code: PMDT00454**



Flexible hose with cuffs 3 mt



Double steel wand



Wet Brush



Chromed flat lance

- **Code: PMDT00928**



Anti-Oil Flexible hose with cuffs 4 mt



Double steel wand



Brush with slides



Chromed flat lance



ANTI-OIL TOOL KIT Ø50-60 mm

- **Code: PMDT00447**



Flexible
hose with
cuffs 3 mt



Complete
aluminium
double wand



Wet Brush



Bristle strip
for Brush



Rubber brush